



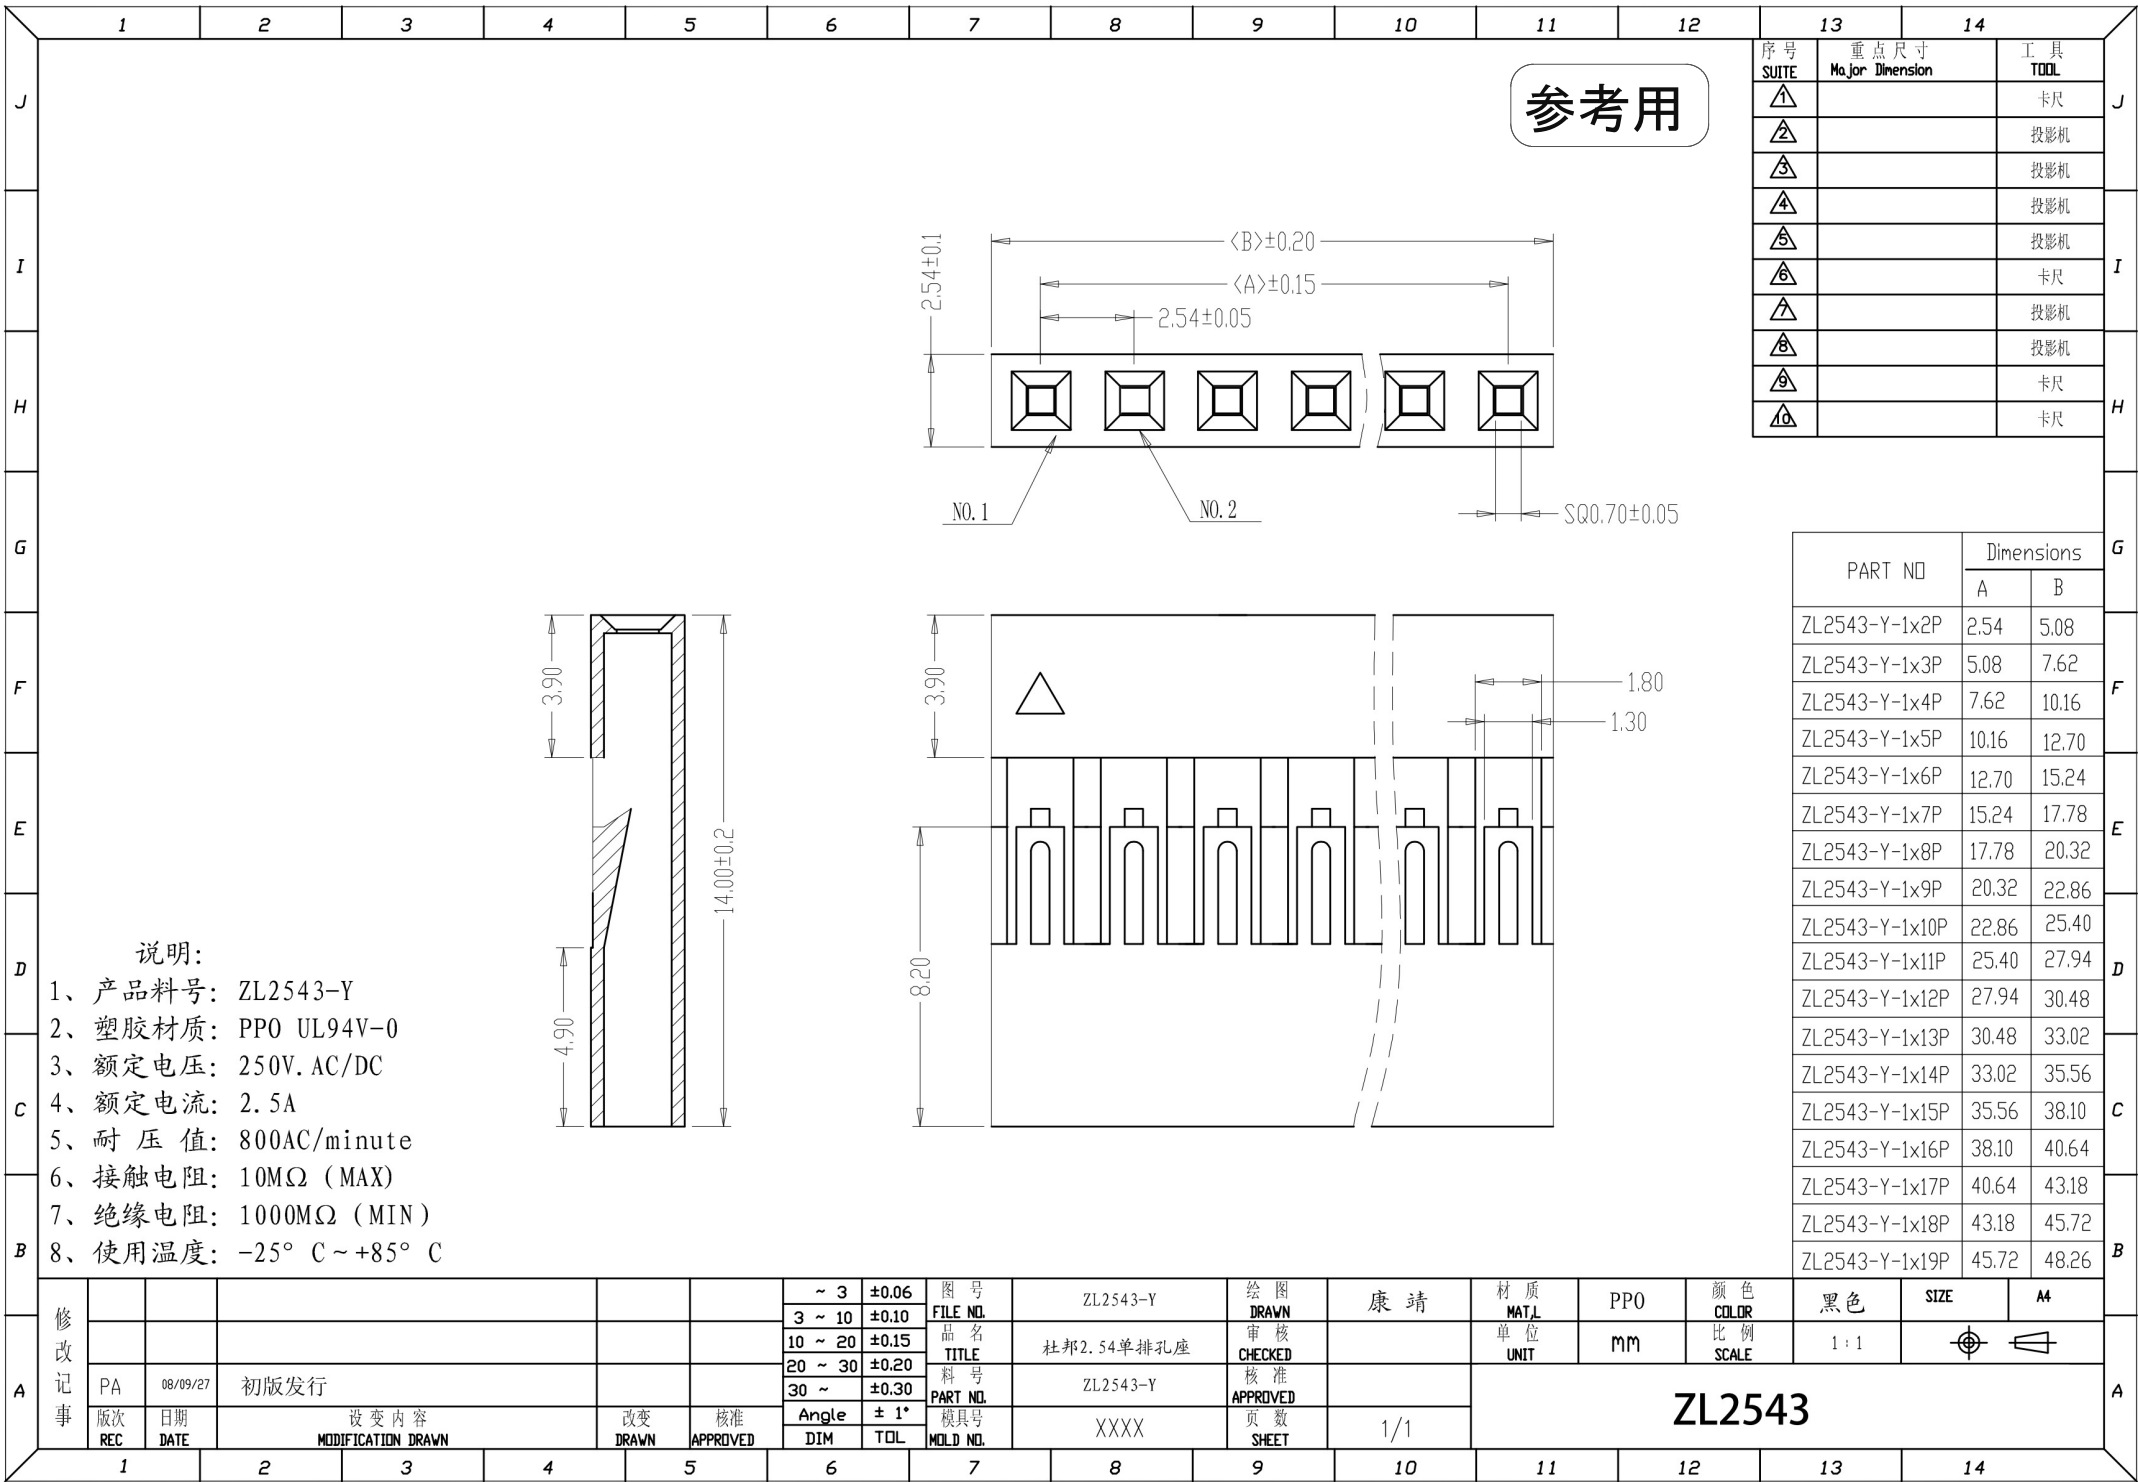

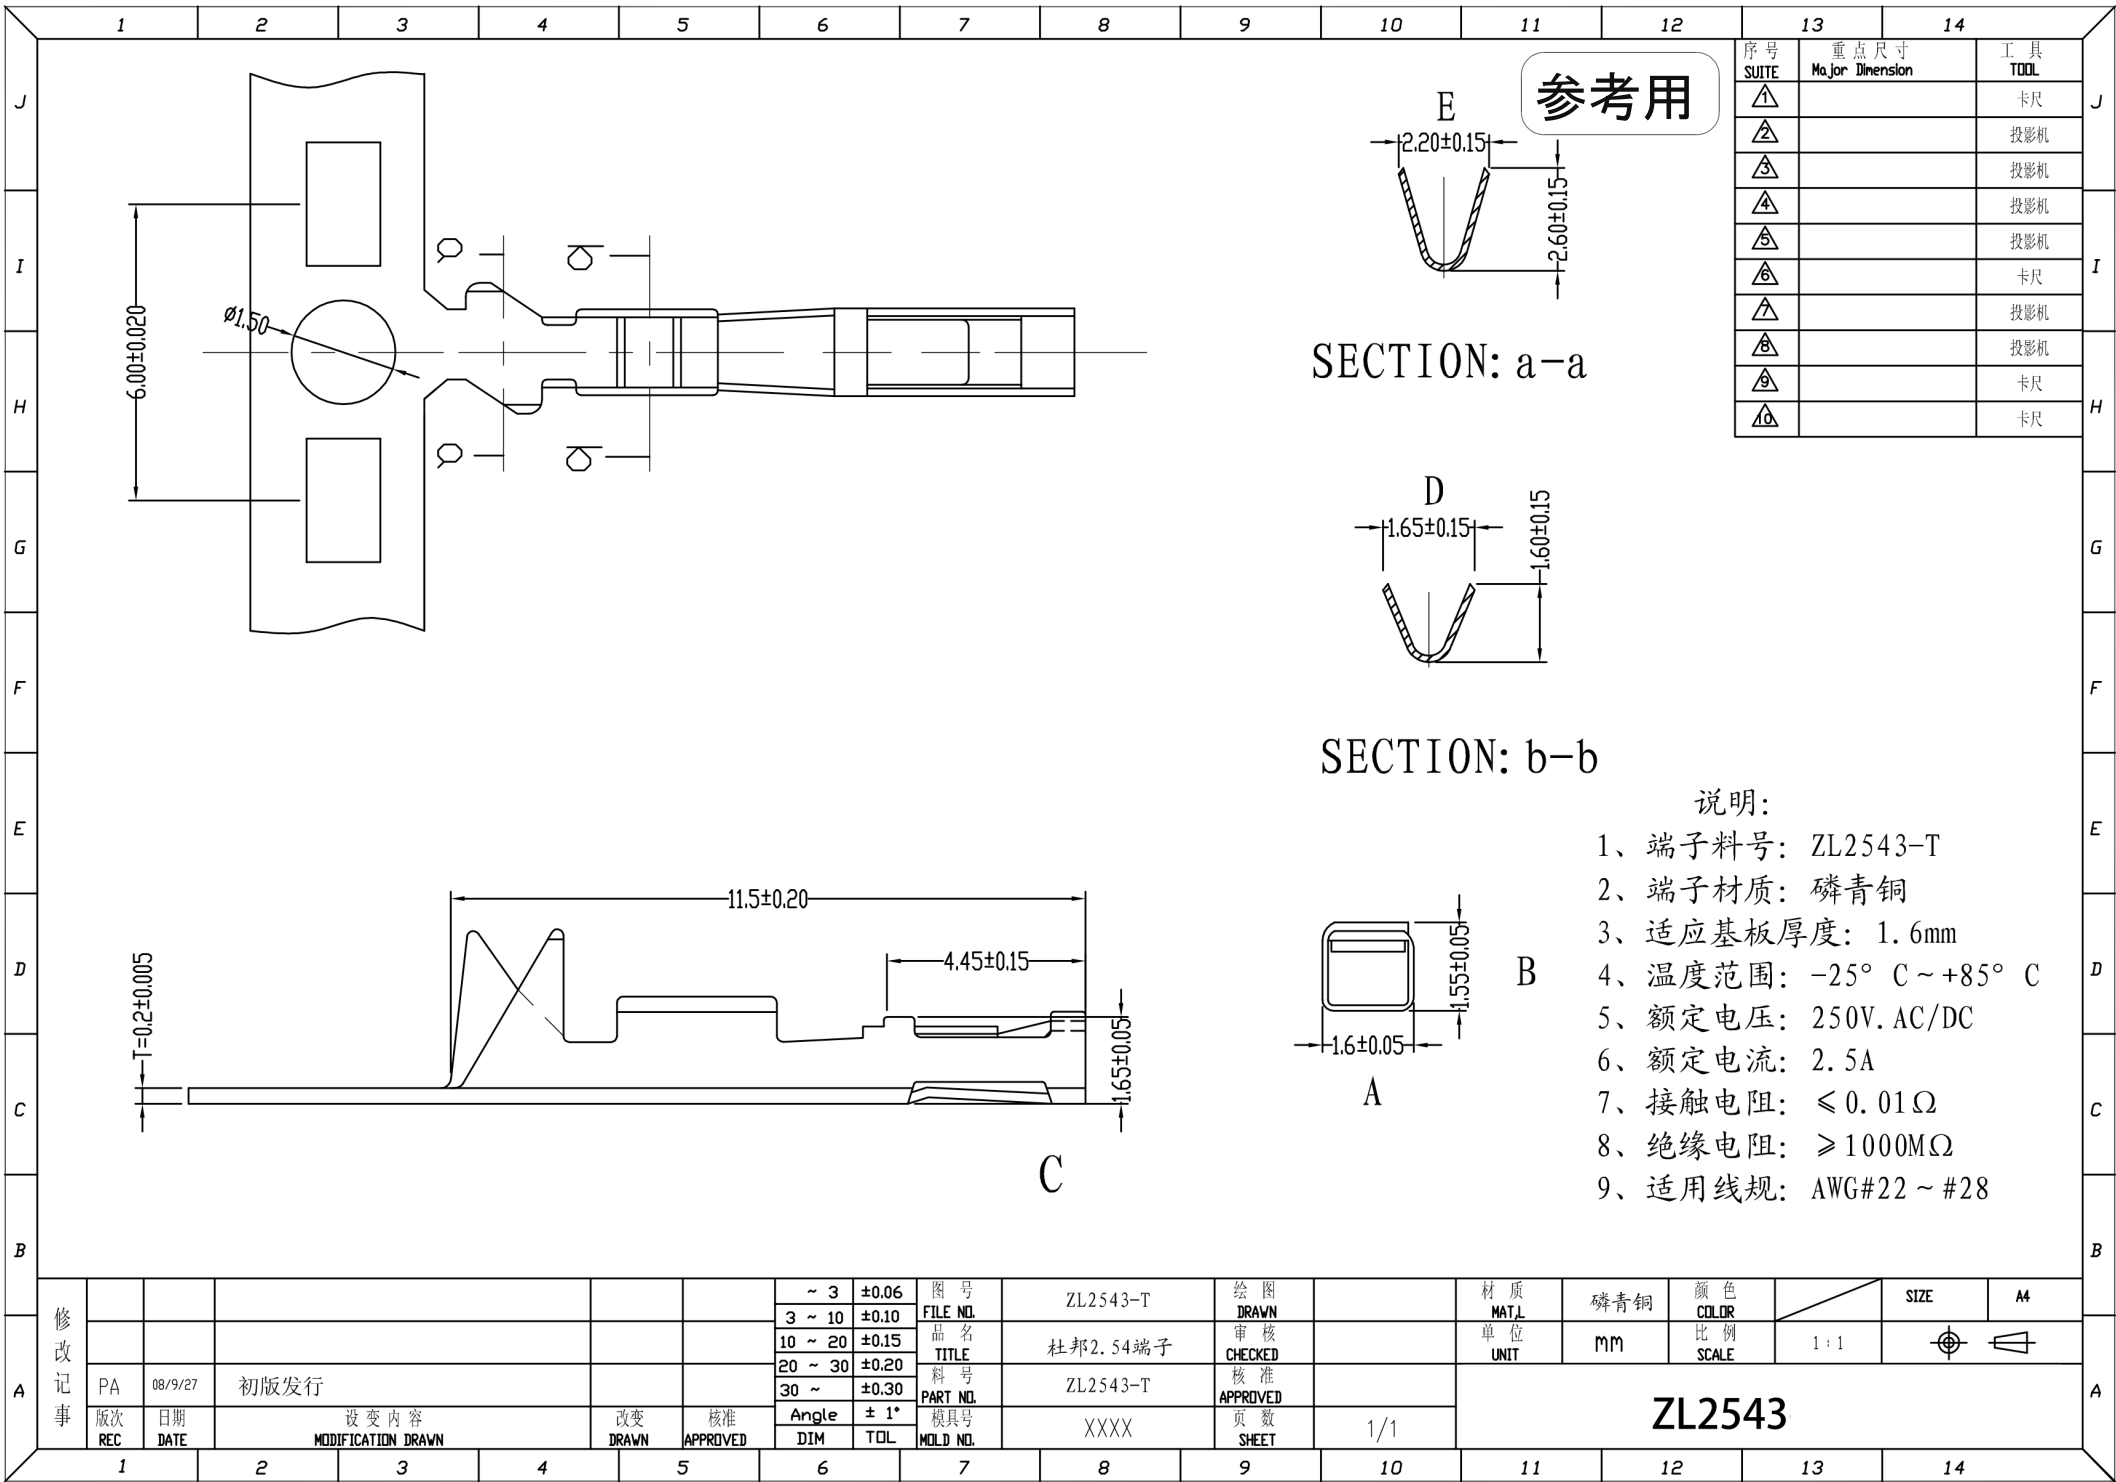

参考用

SECTION: a-a


SECTION: b-b

说明:

- 1、端子料号: ZL2543-T
- 2、端子材质: 磷青铜
- 3、适应基板厚度: 1.6mm
- 4、温度范围: -25° C ~ +85° C
- 5、额定电压: 250V. AC/DC
- 6、额定电流: 2.5A
- 7、接触电阻: ≤ 0.01Ω
- 8、绝缘电阻: ≥ 1000MΩ
- 9、适用线规: AWG#22 ~ #28

修改 记录	PA	08/9/27	初版发行				~ 3	±0.06	图号	ZL2543-T	绘图		材质	磷青铜	颜色		SIZE	A4
	版次	日期	设变内容	改变	核准		3 ~ 10	±0.10	FILE NO.	杜邦2.54端子	审核		单位	MM	比例	1:1		
	REC	DATE	MODIFICATION	DRAWN	APPROVED		10 ~ 20	±0.15	TITLE	ZL2543-T	CHECKED		UNIT		SCALE			
							20 ~ 30	±0.20	料号		核准		ZL2543					
							30 ~	±0.30	PART NO.	XXXX	APPROVED							
							Angle	± 1°	模具号		页数	1/1						
							DIM	TOL	MOLD NO.		SHEET							

DRAWING OF FINISHED PRODUCTS

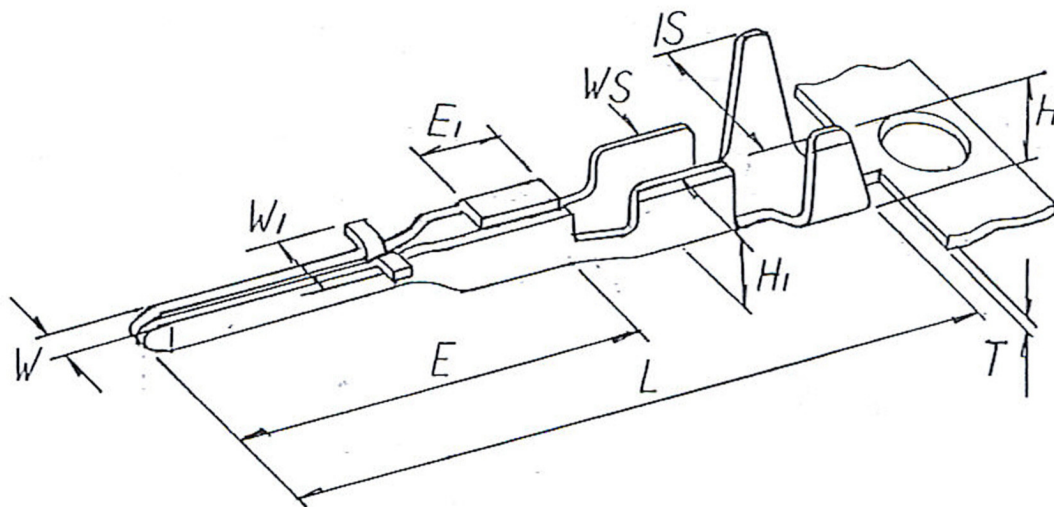

MATERIAL:BRASS
 THICKNESS:0.2
 HARDNESS:H
 PLATING:GOLD FLASH
 INSULATION O.D.:1.5 MAX.
 WIRE RANGE:(AWG)24-28
 RATED VOLTAGE:AC/250V,DC/350V
 RATED CURRENT:AC,DC,3A
 TEMPERATURE RANGE:-25°C TO +85°C

DIMENSION:(MM)
 T:0.2±0.03
 L:17.8±0.3
 E:10.8±0.25
 E1:1.9±0.1
 W:0.64±0.03
 W1:1.5±0.15
 IS:2.3±0.25
 WS:1.5±0.25
 H:2.6±0.25
 H1:1.8±0.25